

SP

FlexSecure FS 35



ED

CABLE SEAL

The FlexSecure FS 35 rates High Security per the ISO 17712:2013 testing standard and is C-TPAT and PIP compliant. This versatile seal fits many applications and is popular for sealing bulk railcars and intermodal containers and trailers. The non-preform cable frays wildly when cut and is galvanized for corrosion protection.

The patent pending locking mechanism inside the anodized aluminum housing makes sure your goods are safe in transit.

C-TPAT & PIP COMPLIANT 

APPLICATIONS

- Cross Border Shipments
- Container Door Latches
- High Value Shipments
- Rail Cars
- Trailer Door Latches

FEATURES

- Available as a Standard Product
 - Order online and GET IT NOW, FOR LESS!
- ISO 17712 classification - High Security
- Tamper-evident non-preformed steel cable unravels when cut and is galvanized for corrosion protection
- Customized laser printing name/logo/consecutive numbers and barcode
- Patent Pending

MATERIAL

- Main body: Aluminum alloy
- Internal Locking Components: Zinc and Steel
- Cable: 3.5 mm galvanized non-preformed aircraft cable

STRENGTH CHARACTERISTICS

- Average pull apart strength: 2400 lbs.(1088kg)

DIMENSIONS

Body: 1.12" x .90" x .30" (28.6 mm x 22.7 mm x 7.6 mm)
Cable Diameter: 3.5 mm (1/8")
Overall length: Standard 12" (Custom lengths available)



 **ASIS 14**
accolades Winner PEOPLE'S CHOICE AWARD FOR MOST INNOVATIVE PRODUCT

SP = Standard Product
Seals shown not actual size.



Tyden Brammall of Scandinavia - Fragtsikkerheds Eksperten
Stolpegårdsvej 7 ,
DK 2820 Gentofte

Ring for yderligere oplysninger www.sealit.dk / www.forsegling.eu

+45 39 68 26 34
tyden@tyden.dk
www.tyden.dk



FlexSecure FS 35



MARKING/PRINTING

- Minimum quantities apply to customized versions of this product – please call for details
- Laser Printing: Name, logo, consecutive numbers, barcode

COLORS

Standard Colors: Red / Blue



Custom colors: Black / White / Green / Yellow / Orange





PACKAGING

Standard: 10 per tray

200 seals per carton

Box dimensions: 22"x 10"x 8" (56cm x 25cm x 20cm)

Weight: 18 lbs. (8.25 kg)

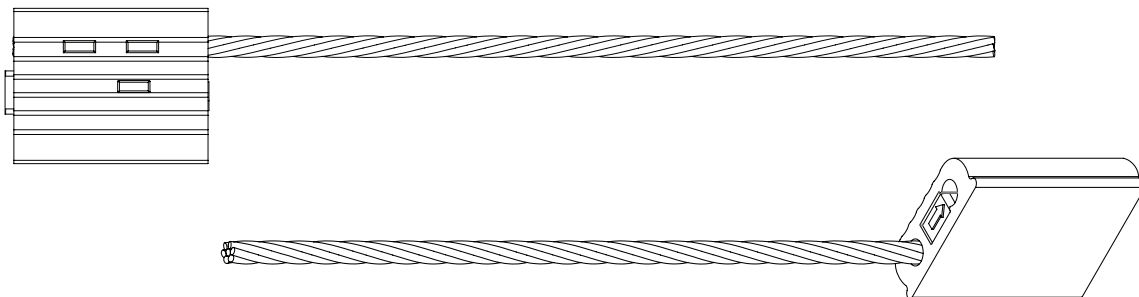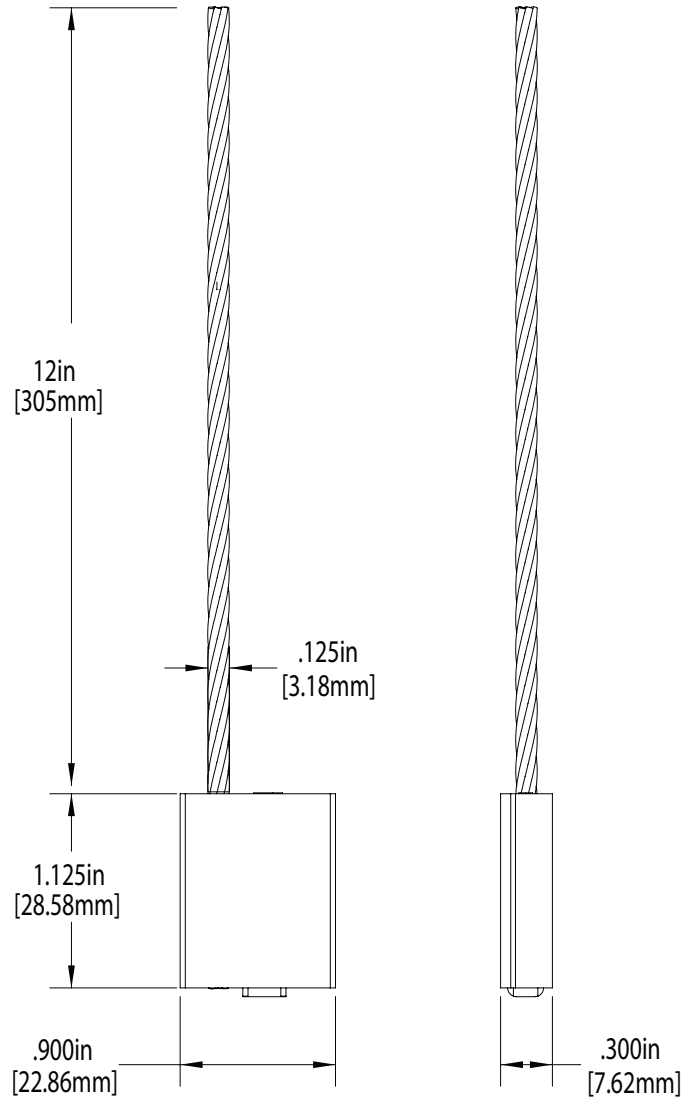

PEOPLE'S CHOICE AWARD FOR MOST INNOVATIVE PRODUCT

FlexSecure FS35 15V2



Tyden Brammall of Scandinavia - Fragsikkerheds Eksperten

Stolpegårdsvej 7 ,

DK 2820 Gentofte

Ring for yderligere oplysninger www.sealit.dk / www.forsegling.eu

+45 39 68 26 34

tyden@tyden.dk

www.tyden.dk

