

### ABCD Status

- A - Stock item generically marked.
- B - Locally marked in house.
- C - Factory manufactured and marked.
- D - Price and delivery on application (long lead item).

The Alum-A-Loc is a 3/16" (4.8mm) heavy duty cargo security cable seal made of corrosion resistant aluminium with proven performance worldwide. It is ISO 17712 high security and C-TPAT compliant.

This seal is used on intermodal containers and trailers. This seal's advanced security features require professional strength cable cutters for removal.

### Product ratings options:

- A - Cold stamped TBE (12") EU SEALED & numbered (14").
- B - Black anodised plain & lasered in house (14").
- C - Cold stamped or powder coated and lasered at factory (12" & 14").



### Seal applications

- |                   |                   |
|-------------------|-------------------|
| Railroad          | Hazmat Containers |
| Drums             | Ammunition Boxes  |
| Tank-Truck Valves | Containers        |
| Truck Trailers    | In-Plant Valves   |
| Box Car Doors     | Scales            |
| Gates             |                   |

### Cable length options

Adjustable length cable (6" min) available in 2" (5 cm) increments up to 24" (active cable lengths).




### Specifications

Lock body: corrosion-resistant aluminium with drill-resistant insert, cold stamped.  
 Galvanized non-preformed aircraft control cable; 12" (30 cm) active cable length is standard.  
 Custom lengths available.  
 7x7 cable construction standard; 3/16" (5 mm) diameter. Locking strength: average pull-apart strength 2,800 lbs(12.4 kN).

### Marking

Cold stamped, ink jet or laser.  
 Barcode option available on white or yellow powder coated bodies.

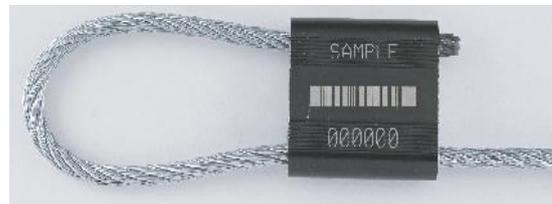

**Alum -A - Loc Cable Seal**

045•1•1\_Alum-A-Loc

**ABCD Status**

- A - Stock item generically marked.
- B - Locally marked in house.
- C - Factory manufactured and marked.
- D - Price and delivery on application (long lead item).

The Alum-A-Loc is a 3/16" (4.8mm) heavy duty cargo security cable seal made of corrosion resistant aluminium with proven performance worldwide. It is ISO 17712 high security and C-TPAT compliant.

This seal is used on intermodal containers and trailers. This seal's advanced security features require professional strength cable cutters for removal.


**Colours**



Mill finish aluminium.  
Anodised red, blue, green, black, white,

**Packing**

250 per box; 39 lbs. per box, 18 kg, .0189 m3, .67 ft3.  
Box dimensions: 12"x12"x8" (31cm x 31 cm x 20cm)  
Part number CAL316.

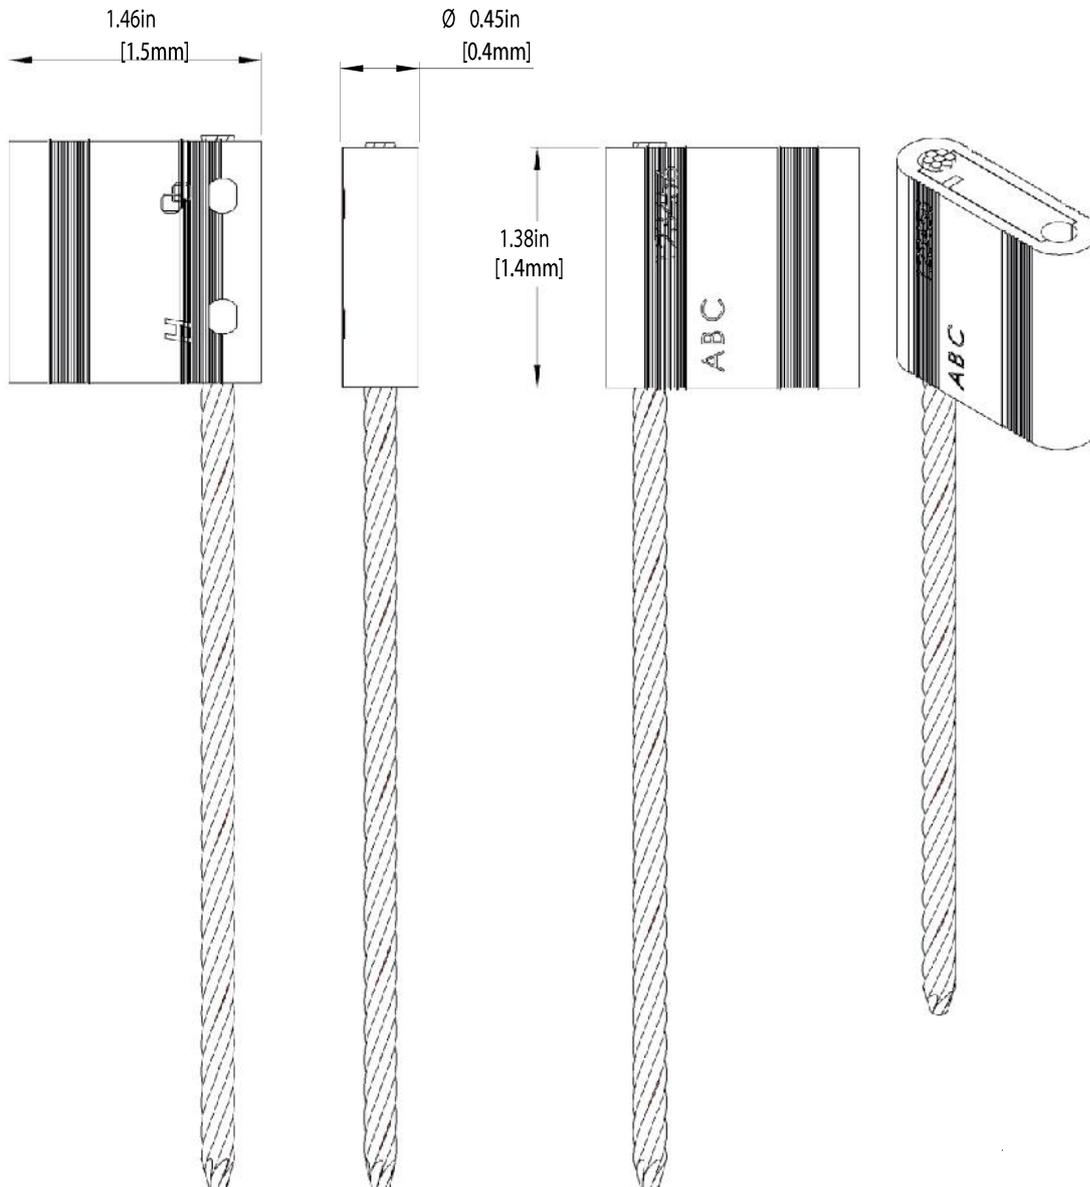

**Alum - A - Loc Cable Seal**

045•2•1\_Alum-A-Loc